


RR T5

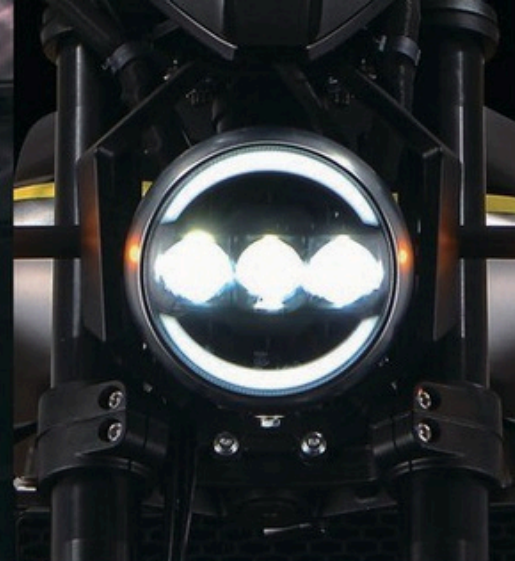

Max. Power Output (kw/rpm)

31.5

9500r/min

Max. Torque (Nm/rpm)

34

8000r/min

Key Features

- Cradletype steel pipe frame
- LEDlens array headlamp
- Inverted front fork for option
- Intelligent TFT cluster
- 14.5L fuel tank volume
- Disc front and rear brakes
- Semi-heat fusion scar tire
- 1425mm wheelbase
- Radial tyre for option
- Spoked wheel for option



FUZHOU ALADDINRONGHAI
TECH CO. LTD.
福州阿拉丁榕海科技有限公司

RR T5



Specifications

Engine

	T5 125CC CBS	T5 125CC ABS cylinder, four Valve, watercooling, vertical
Engine Type	Single cylinder, four Valve, watercooling, vertical	Single
Engine Displacement	124.2 cc	124.2 cc
Max. Power Output	11 KW / 10000 rpm	10 KW / 8750 rpm 11 Nm / 8000 rpm
Max. Torque	11.5 Nm / 8500 rpm	Euro V +
Emission Standards	Euro V +	

Chassis, Dimensions and Weight

Length x Width x Height (mm)	2065 x 800 x 1100 mm	2065 x 800 x 1100 mm
Seat Height (mm)	810	810
Wheelbase (mm)	1420	1420
Kerb Weight (kg)	155	155

Wheels, Suspension and Brakes

Front brake	Single-disc Ø300mm	Single-disc Ø300mm, opposed four pistons
Rear brake	Single disc Ø240mm, opposed two pistons	Single disc Ø240mm, opposed two pistons
Tyres (Front/Rear)	Fr:110/70 R17 M/C Rr:150/70 R17 M/C CST	Fr:110/70 R17 M/C Rr:150/70 R17 M/C Tengsen-Timsun
Suspension Front	Positive absorber	Inverted absorber
Suspension Rear	Monoshock	Monoshock

Specifications

Engine

	T5 401 ABS	T5 250SR ABS
Engine Type	Double cylinder, 4-stroke, water-cooling, camshaft upward, 8valve	single cylinder, 4-stroke, water-cooling, camshaft upward, 4valve
Engine Displacement	400.9 cc	249.2 cc
Max. Power Output	31.5 KW / 9500 rpm	19 KW / 9000kw rpm
Max. Torque	34 Nm / 8000 rpm	21 Nm / 7000 rpm
Emission Standards	Euro V	Euro V

Chassis, Dimensions and Weight

Length x Width x Height (mm)	2065 x 800 x 1100 mm	2065 x 800 x 1100 mm
Seat Height (mm)	810	810
Wheelbase (mm)	1420	1420
Kerb Weight (kg)	170	170

Wheels, Suspension and Brakes

Front brake	Dual-disc Ø300mm	Single disc Ø300mm Single disc Ø240mm Fr:110/70 R17
Rear brake	Single disc Ø240mm	M/C Rr:150/70 R17 M/C Tengsen-Timsun Inverted
Tyres (Front/Rear)	Fr:120/70 ZR17 Rr:160/60 ZR17 Radial type	Monoshock
Suspension Front	Inverted	
Suspension Rear	Monoshock	

Specifications

Engine

	T5 125CC SC	T5 250CC SC
Engine Type	Single cylinder, four Valve, watercooling, vertical	singlecylinder, 4-stroke, water-cooling, 4valve
Engine Displacement	124.2 cc	249.2 cc 19 KW /
Max. Power Output	11 KW / 10000 rpm	9000 rpm 21 Nm /
Max. Torque	11.5 Nm / 8500 rpm	7000 rpm Euro V
Emission Standards	Euro V +	

Chassis, Dimensions and Weight

Length x Width x Height (mm)	2065 x 800 x 1100 mm	2100 x 800 x 1100 mm
Seat Height (mm)	810	810
Wheelbase (mm)	1420	1420
Kerb Weight (kg)	155	173 with fuel. Net:160

Wheels, Suspension and Brakes

Front brake	Single-disc Ø300mm	Single-disc Ø300mm, opposed four pistons
Rear brake	Single disc Ø240mm, opposed two pistons	Single disc Ø240mm, opposed two pistons
Tyres (Front/Rear)	Fr:110/70 R17 M/C Rr:150/70 R17 M/C CST	Fr:120/70 R17 Rr:160/60 R17 off road style tire
Suspension Front	Positive absorber	Inverted
Suspension Rear	Monoshock	Monoshock